


# BLU25 AIR-WATER HEAT EXCHANGERS FOR DOOR OR WALL MOUNTING

Characteristics	M.U.	BLU25BX0B	BLU25CX0B
Cooling capacity - W10A35	W	2500	2500
Water flow rate	l/h	500	500
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	398	398
Height	mm	901	901
Depth	mm	137	137
Max. current	A	0,33	0,74
Fuse T	A	2	2
Absorbed electric power - W10A35	W	80	82
Duty cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Refrigerant	-	Water	Water
Hydraulic circuit max. pressure	bar	5	5
Water connections	-	1/2"G	1/2"G
Air flow rate	m <sup>3</sup> /h	860	860
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
Protection level EN60529	-	IP55	IP55
Noise level	dB (A)	58	58
Weight	Kg	19	19
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000119
Level switch, NO	C16000140
Stainless steel version	
Special paint on request	



## Dimensions

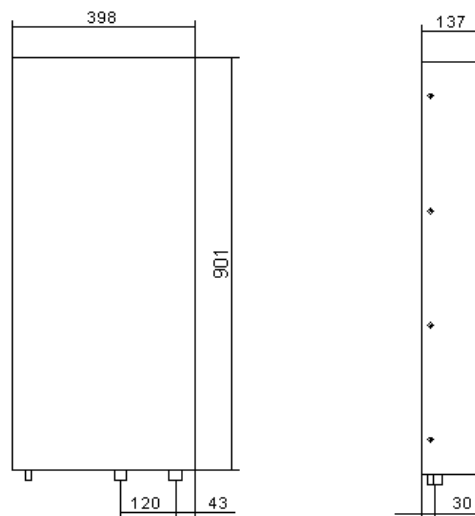

## Performances

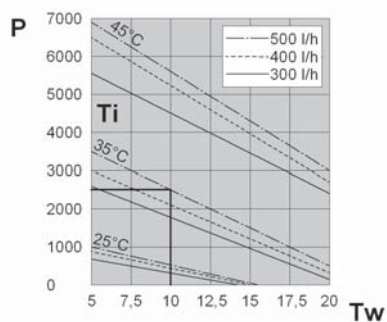

**P** = Cooling capacity (W)  
**Tw** = Inlet water temperature (°C)  
**Ti** = Inside enclosure temperature (°C)