


# BLUA5 AIR-WATER HEAT EXCHANGERS FOR DOOR OR WALL MOUNTING

Characteristics	M.U.	BLUA5BX0B	BLUA5GX0B
Cooling capacity - W10A35	W	15000	15000
Water flow rate	l/h	2000	2000
Power supply	V ~ Hz	230 1~ 50-60	400/440 2~ 50-60
Width	mm	797	797
Height	mm	1932	1932
Depth	mm	206	206
Max. current	A	1,4	0,9
Fuse T	A	4	2
Absorbed electric power - W10A35	W	320	340
Duty cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Refrigerant	-	Water	Water
Hydraulic circuit max. pressure	bar	8	8
Water connections	-	3/4"G	3/4"G
Air flow rate	m <sup>3</sup> /h	2900	2900
Internal temperature range	°C	20-60	20-60
External temperature range	°C	1-70	1-70
Protection level EN60529	-	IP55	IP55
Noise level	dB (A)	72	70
Weight	Kg	92	92
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
Thermostat 20-46°C, gas bulb 15A	C16000002
Solenoid valve, NC	C15000120
Level switch, NO	C16000140
Stainless steel version	
Special paint on request	



## Dimensions

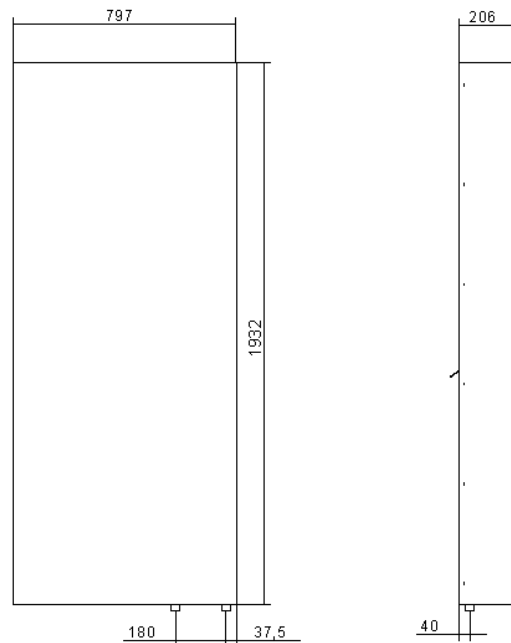

## Performances

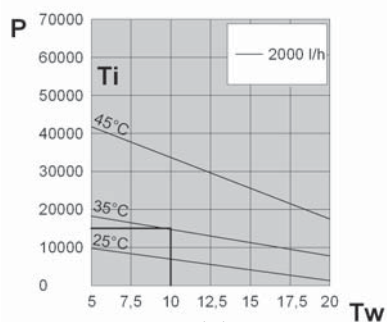

P = Cooling capacity (W)  
 Tw = Inlet water temperature (°C)  
 Ti = Inside enclosure temperature (°C)