

EGO10 COOLING UNITS FOR DOOR OR WALL MOUNTING

Characteristics	M.U.	EGO10BT1B	EGO10CT1B	EGO10GT1B
Cooling capacity EN814 - A35A35	W	1000	1000	1000
Cooling capacity EN814 - A35A50	W	790	790	790
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	348	348	348
Height	mm	783	783	783
Depth	mm	215	215+42**	215+58**
Max. current	A	3	6,7	2
Inrush current	A	10,5	23	8
Fuse T	A	6	10	4
Absorbed electric power EN814 - A35A35	W	570	590	590
Absorbed electric power EN814 - A35A50	W	650	670	670
Duty cycle	-	100%	100%	100%
Electrical connection	-	4 pole plug	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,23	0,23	0,23
Cooling circuit max. pressure	bar	25	25	25
External fan air flow	m ³ /h	570	570	570
Enclosure fan air flow	m ³ /h	330	330	330
Internal temperature range	°C	20-46	20-46	20-46
Temperature setting	-	Electronic thermostat factory set at 35°C		
External temperature range	°C	20-55*	20-50	20-50
Protection level EN60529 - enclosure side	-	IP54	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	Kg	28	29	29
Conformity	-	CE	CE	CE
Colour	-	RAL 7035 orange peel effect		


Accessories/Options	
Pack of 5 cloth air filters	AAEFP10
Pack of 1 metal air filter	AAEFM10
Semi-recessed assembly structure	
Stainless steel version	
Special paint on request	

* 50 °C at 60 Hz


** Depth increases due to the external mounting of the autotransformer



Dimensions

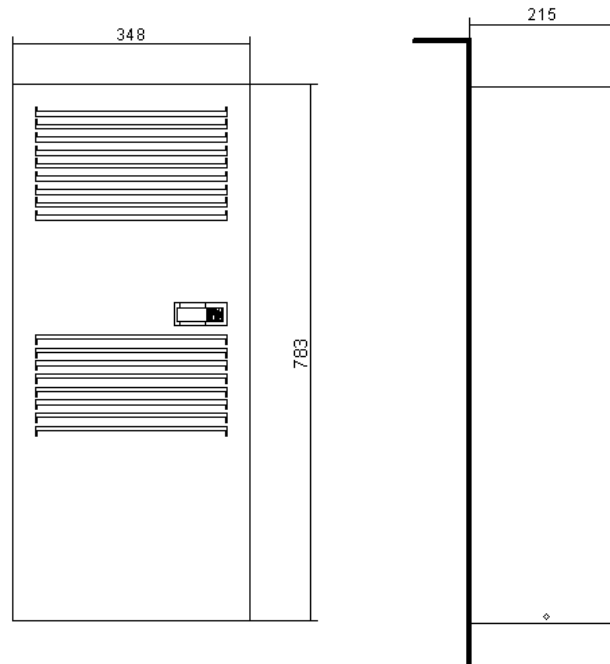

Performances

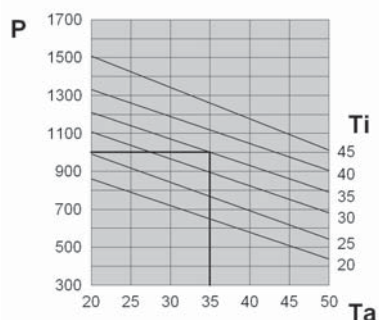

P = Cooling capacity (W)
 Ta = Ambient temperature (°C)
 Ti = Inside enclosure temperature (°C)