


EGO30 COOLING UNITS FOR DOOR OR WALL MOUNTING

Characteristics	M.U.	EGO30BT1B	EGO30LT1B
Cooling capacity EN814 - A35A35	W	2900	2900
Cooling capacity EN814 - A35A50	W	2250	2250
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60
Width	mm	500	500
Height	mm	1270	1270
Depth	mm	336	336
Max. current	A	8,2	2,6
Inrush current	A	37,4	14
Fuse T	A	16	6
Absorbed electric power EN814 - A35A35	W	1340	1220
Absorbed electric power EN814 - A35A50	W	1560	1440
Duty cycle	-	100%	100%
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,84	0,84
Cooling circuit max. pressure	bar	25	25
External fan air flow	m ³ /h	1450	1450
Enclosure fan air flow	m ³ /h	860	860
Internal temperature range	°C	20-46	20-46
Temperature setting	-	Electronic thermostat factory set at 35°C	
External temperature range	°C	20-50	20-50
Protection level EN60529 - enclosure side	-	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	70	70
Weight	Kg	80	84
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
Pack of 5 cloth air filters	C15000183
Pack of 1 metal air filter	C15000185
Semi-recessed assembly structure	
Stainless steel version	
Special paint on request	



Dimensions

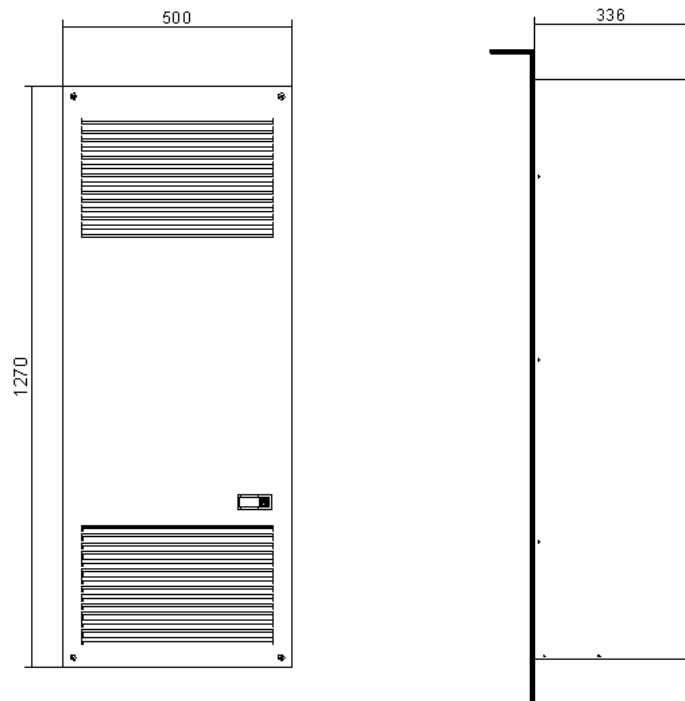

Performances

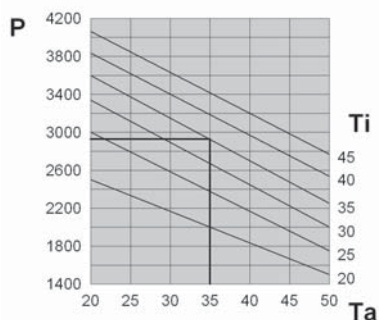

P = Cooling capacity (W)
 Ta = Ambient temperature (°C)
 Ti = Inside enclosure temperature (°C)