


EGO40 COOLING UNITS FOR DOOR OR WALL MOUNTING

Characteristics	M.U.	EGO40BT1B	EGO40LT1B
Cooling capacity EN814 - A35A35	W	3850	3850
Cooling capacity EN814 - A35A50	W	2870	2870
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60
Width	mm	500	500
Height	mm	1270	1270
Depth	mm	336	336
Max. current	A	9,5	3,6
Inrush current	A	35,2	18
Fuse T	A	16	8
Absorbed electric power EN814 - A35A35	W	1710	1780
Absorbed electric power EN814 - A35A50	W	1990	2050
Duty cycle	-	100%	100%
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	1,14	1,14
Cooling circuit max. pressure	bar	25	25
External fan air flow	m ³ /h	1450	1450
Enclosure fan air flow	m ³ /h	1450	1450
Internal temperature range	°C	20-46	20-46
Temperature setting	-	Electronic thermostat factory set at 35°C	
External temperature range	°C	20-50	20-50
Protection level EN60529 - enclosure side	-	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	70	70
Weight	Kg	82	85
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
Pack of 5 cloth air filters	C15000183
Pack of 1 metal air filter	C15000185
Semi-recessed assembly structure	
Stainless steel version	
Special paint on request	



Dimensions

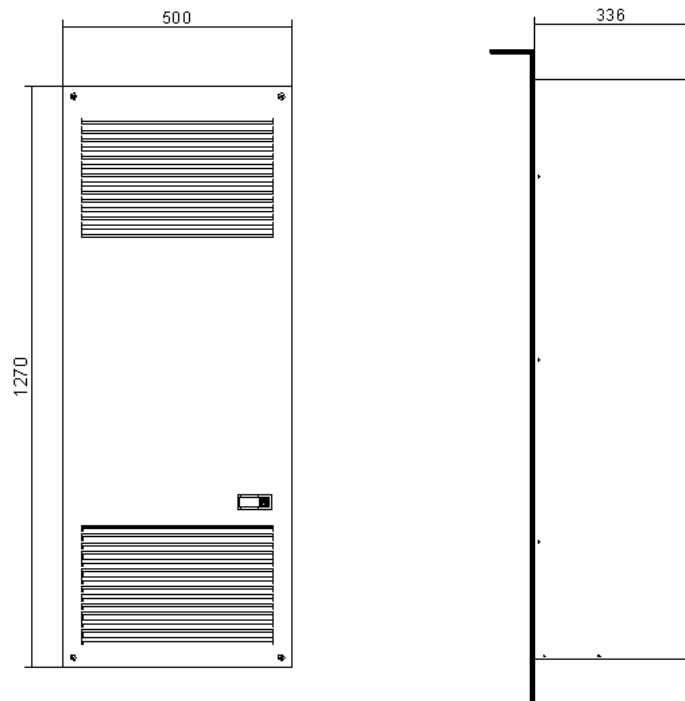

Performances

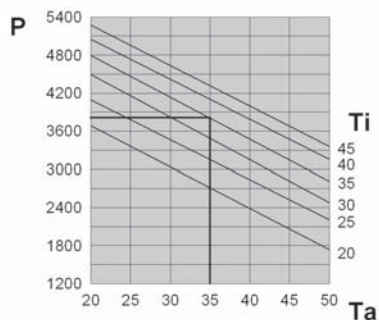

P = Cooling capacity (W)
 Ta = Ambient temperature (°C)
 Ti = Inside enclosure temperature (°C)