


EGO80 COOLING UNITS FOR DOOR OR WALL MOUNTING

Characteristics	M.U.	EGO80MTEQ	EGO80NTEQ
Cooling capacity EN814 - A35A35	W	7600	7950
Cooling capacity EN814 - A35A50	W	5700	5930
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	380	380
Max. current	A	8,1	9,3
Inrush current	A	30,7	32,5
Fuse T	A	16	16
Absorbed electric power EN814 - A35A35	W	3300	4035
Absorbed electric power EN814 - A35A50	W	4910	5845
Duty cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
Refrigerant R407C	Kg	2,3	2,3
Cooling circuit max. pressure	bar	27	27
External fan air flow	m ³ /h	2900	2900
Enclosure fan air flow	m ³ /h	2900	2900
Internal temperature range	°C	20-46	20-46
Temperature setting	-	Electronic thermostat factory set at 35°C	
External temperature range	°C	20-50	20-50
Protection level EN60529 - enclosure side	-	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	75	75
Weight	Kg	160	160
Conformity	-	CE	CE
Colour	-	RAL 7035 smooth paint	


Accessories/Options	
Pack of 5 cloth air filters	C15000188
Pack of 1 metal air filter	C15000189
Stainless steel version	
Special paint on request	



Dimensions

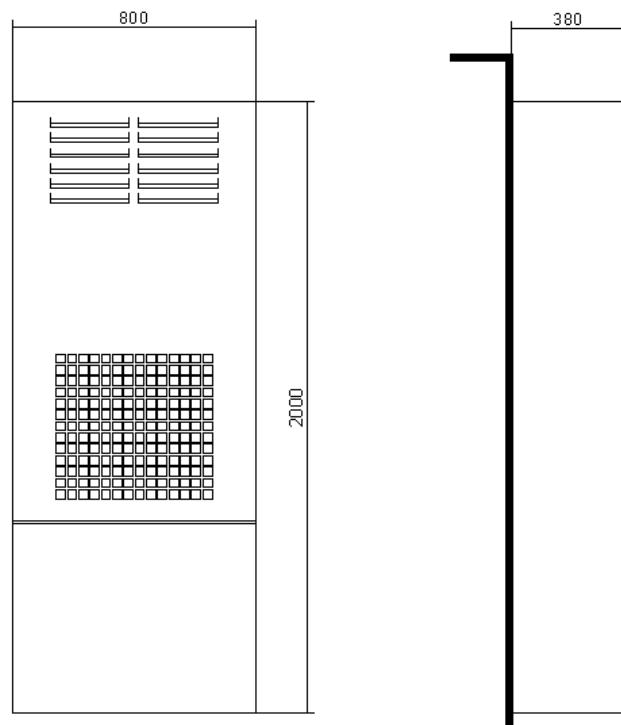

Performances (EGO80MMEQ)

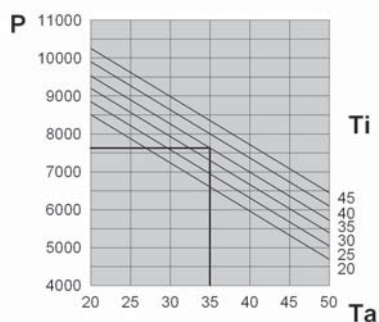

P = Cooling capacity (W)
 Ta = Ambient temperature (°C)
 Ti = Inside enclosure temperature (°C)