

SKY15 COOLING UNITS FOR DOOR OR WALL MOUNTING


Characteristics	M.U.	SKY15BTOB	SKY15CTOB	SKY15GTOB
Cooling capacity EN814 - A35A35	W	1550	1550	1550
Cooling capacity EN814 - A35A50	W	1200	1200	1200
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	400	400	400
Height	mm	950	950	950
Depth	mm	233	233	233
Max. current	A	5,3	12,9	2,9
Inrush current	A	18	39	11
Fuse T	A	10	20	6
Absorbed electric power EN814 - A35A35	W	880	900	900
Absorbed electric power EN814 - A35A50	W	980	1000	1000
Duty cycle	-	100%	100%	100%
Electrical connection	-	4 pole plug	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,44	0,44	0,44
Cooling circuit max. pressure	bar	25	25	25
External fan air flow	m ³ /h	1050	1050	1050
Enclosure fan air flow	m ³ /h	570	570	570
Internal temperature range	°C	20-46	20-46	20-46
Temperature setting	-	Electronic thermostat factory set at 35 °C		
External temperature range	°C	20-55*	20-50	20-50
Protection level EN60529 - enclosure side	-	IP54	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	Kg	38	40	40
Conformity	-	CE	CE	CE
Colour	-	RAL 7035 orange peel effect		

* 50 °C at 60 Hz


Accessories/Options	
Pack of 5 cloth air filters	C15000181
Pack of 1 metal air filter	C15000182
Stainless steel version	
Special paint on request	



Dimensions

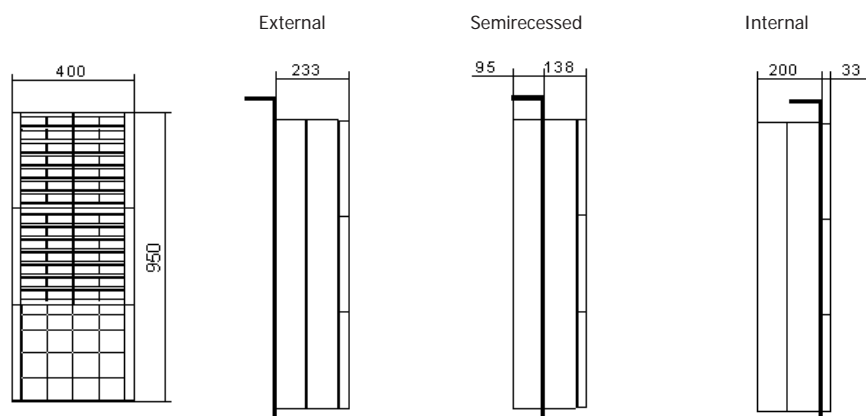

Performances

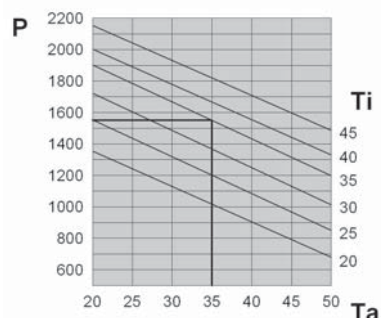

P = Cooling capacity (W)
 Ta = Ambient temperature (°C)
 Ti = Inside enclosure temperature (°C)