

# EGO20 COOLING UNITS FOR DOOR OR WALL MOUNTING


Characteristics	M.U.	EGO20BT1B	EGO20CT1B	EGO20LT1B
Cooling capacity EN814 - A35A35	W	2000	2000	2000
Cooling capacity EN814 - A35A50	W	1510	1510	1510
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60	400 3~ 50-60
Width	mm	405	405	405
Height	mm	999	999	999
Depth	mm	237	237	237
Max. current	A	6,5	13,3	2,5
Inrush current	A	24	48	10
Fuse T	A	10	20	6
Absorbed electric power EN814 - A35A35	W	1080	1110	970
Absorbed electric power EN814 - A35A50	W	1290	1310	1150
Duty cycle	-	100%	100%	100%
Electrical connection	-	4 pole plug	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,42	0,42	0,59
Cooling circuit max. pressure	bar	25	25	25
External fan air flow	m <sup>3</sup> /h	1050	1050	1050
Enclosure fan air flow	m <sup>3</sup> /h	860	860	860
Internal temperature range	°C	20-46	20-46	20-46
Temperature setting	-	Electronic thermostat factory set at 35°C		
External temperature range	°C	20-55*	20-50	20-50
Protection level EN60529 - enclosure side	-	IP54	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	65	65	65
Weight	Kg	52	54	54
Conformity	-	CE	CE	CE
Colour	-	RAL 7035 orange peel effect		

\* 50 °C at 60 Hz


Accessories/Options	
Pack of 5 cloth air filters	C15000163
Pack of 1 metal air filter	C15000164
Semi-recessed assembly structure	
Stainless steel version	
Special paint on request	



## Dimensions

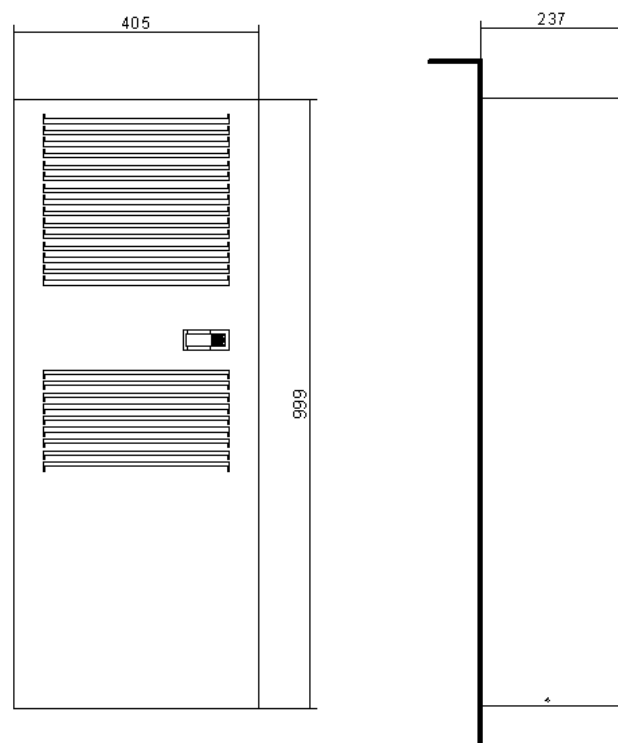

## Performances

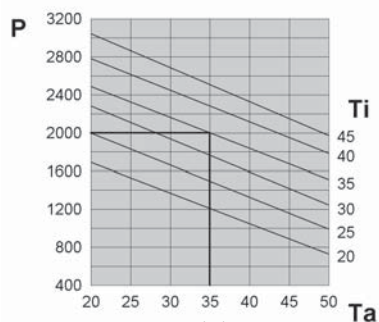

P = Cooling capacity (W)  
 Ta = Ambient temperature (°C)  
 Ti = Inside enclosure temperature (°C)